
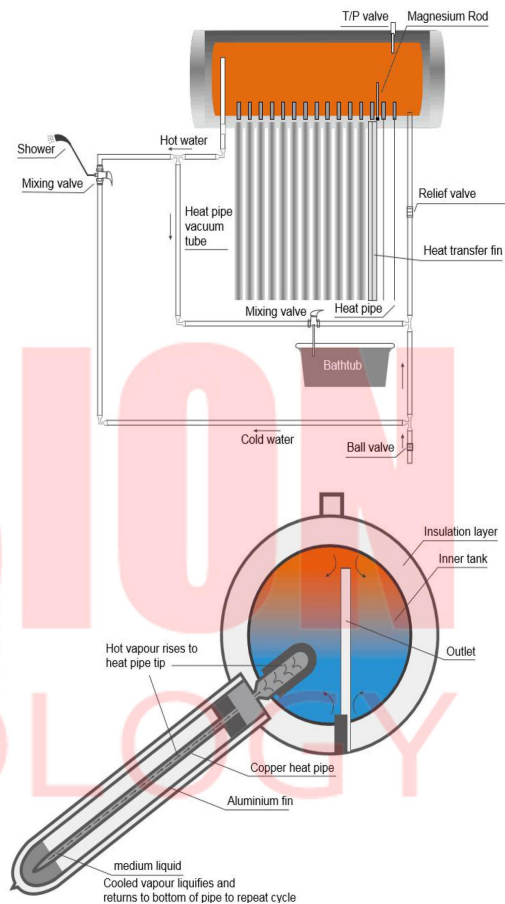


PASSION TECHNOLOGY

Integrative Pressurized Solar Water Heater PT-H

Model	PT-H-10	PT-H-15	PT-H-18	PT-H-20	PT-H-24	PT-H-25	PT-H-30
Storage Tank	100L	150L	180L	200L	240L	250L	300L
	Inner Tank		Stainless Steel SUS304 2B/SUS316L				
	Outer Tank		Colored Steel(Sliver/White)/SUS201/SUS304 2B/SUS316L				
	Insulation Layer		High Density Polyurethane Foaming				
Tube QTY(PCS)	10	15	18	20	24	25	30
Dustproof Rubber	EPDM						
Dsily Heat Gain	8.5MJ/m ²						
Work Pressure	0.6MPa						
Three Target Vacuum Tube	Diameter/Length: φ58mm/1800mm; High boron and silicon content 3.3; Structure:Gradual change SS-AL-Nx/Cu selective absorption coating; Vacuum Degree:P<=5*10 ⁻³ ;						
Heat Pipe	Condesor: φ14*70mm; Thickness: 0.5mm ; Material: red copper TU1+water; Transfer Power:>=150W; Working Pressure:4Mpa; Welding Pressure:4Mpa;						
Bracket	Galvanized Steel with Plastic Coating in Black color/Aluminum Alloy/SUS201/SUS3042B/SUS316L, 0/20/30/45 degrees						
Contour Aperture Area	1.23m ²	1.84m ²	2.22m ²	2.47m ²	2.96m ²	3.08m ²	3.70m ²
Aperture Area	0.95m ²	1.42m ²	1.70m ²	1.89m ²	2.27m ²	2.36m ²	2.83m ²
Absorption Area	0.82m ²	1.22m ²	1.46m ²	1.62m ²	1.96m ²	2.04m ²	2.43m ²
Accessories(Optional)	T/P Valve,Electrical Heater & Magnesium Bar						
OEM Service:	Logo painting on products and package is for free (20FT,40FT,40HQ)						

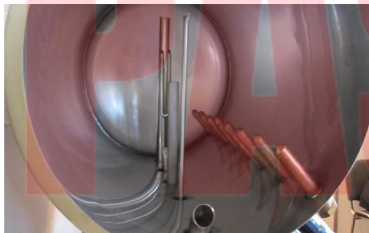

JIAXING PASSION NEW ENERGY TECHNOLOGY CO., LTD. || www.thermalsolarwaterheater.com

Email: passionsolar@vip.126.com/info@passion-solar.com || Whatsapp: +86 157 5736 4288 / +86 135 1138 8384